




TC1279-111-30A Part Number:

Description: **ELBOW ASSEMBLY, DOWN, 30 DEGREES,**

EXTERNAL LID, 100mm DUCT



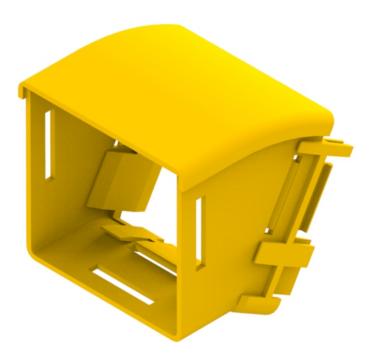

Use / Application:

This 10-mm down elbow is a 30° angled lead off with an external lid, so that new optical fibre cords can be installed within the elbow and existing optical fibre cords removed, where necessary. It is usually used where an angular duct feed off or an alignment adjustment is needed. There are two 100-mm outlets. One is equipped with a glued-in, modified joiner. (The special joiner provides a smooth internal curve for optical fibre cords.) The other side uses either a: standard joiner (Part No. TC1279-27) or a slotless joiner (Part No: TC1279-248A); that are available separately.

Benefits & Features:

- Provides easy access for optical fibre cords, and allows optical fibre cords to be retrofitted
- Removable cover supplied
- A special, glued-in joiner provides a smooth transition for optical fibre cords
- Clips straight into either a: standard joiner (Part No. TC1279-27) or a slotless joiner (Part No: TC1279-248A); which are available separately
- Tough, fire retardant material
- Purchase by the unit

Technical Attributes:

Dimensions 112mm (W) x 108/120mm (H)(Body/Joiner) x 113mm (D)

Weight 156g

Fire retardant plastic, Halogen free, UL94-VO rated **Materials**

Mulder-Hardenberg BV infonl@m-h.biz www.mulder-hardenberg.com