




Part Number: **TC1279-23SLA**
Description: **SLOTTED DUCT AND LID ASSEMBLY,
100mm x 100mm DUCT x 2m**

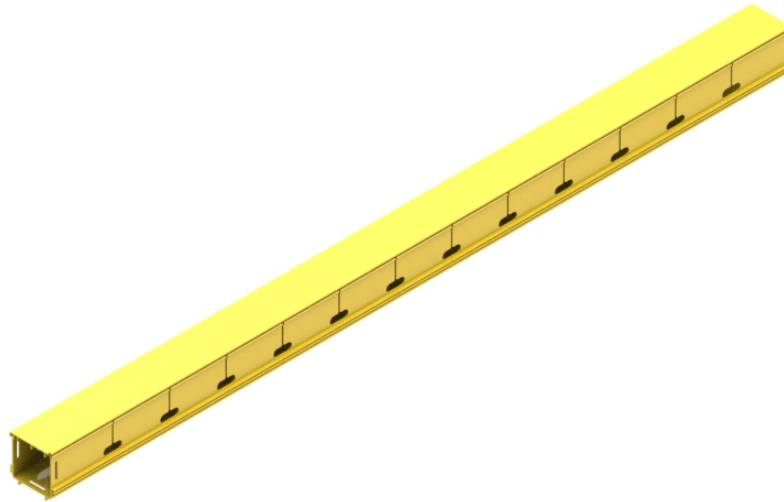

Use / Application:

This 100mm duct is similar to standard duct except that it is slotted to allow optical fibre cord feed-off at 150mm intervals and external vision of the duct's contents. It carries up to 400 pigtails or patch cords (Ø3mm) to a depth of 50mm, without excess stress on them, during removal processes. The duct comes complete with a lid and is made of tough Noryl plastic with a non-halogen, fire retardant. It connects to other 100mm duct sections and various bends adapters etc., using either: a standard joiner (Part No: TC1279-27, Telstra Part No: S 353/514) or a slotless joiner (Part No: TC1279-248A). It is recommended that each outlet slot be fitted with an outlet radius guide (Part No: TC1279-212KIT – x10 in a pack), that will guarantee the outgoing radius for every housed optical fibre cord. These are available separately.

Benefits & Features:

- Includes cover (Part No: TC1279-24)
- It is recommended that each outlet slot be fitted with an outlet radius guide (Part No: TC1279-212KIT – x10 in a pack), that will guarantee the outgoing radius for every housed optical fibre cord. These are available separately
- Clips straight into joiner
- Tough, fire retardant material
- Joiners (Part No: TC1279-27, Telstra Part No: S 353/514 or Part No: TC1279-248A); available separately.
- Purchase by the unit

Technical Attributes:

Dimensions	120mm (W) x 105mm (H) x 2,000mm (D)
Weight	3.3kg
Materials	Fire retardant plastic, Halogen free, UL94-VO rated