




Part Number: **TC1279-23SLASN**  
Description: **SLOTTED DUCT AND LID ASSEMBLY,  
100mm x 100mm x 2m**

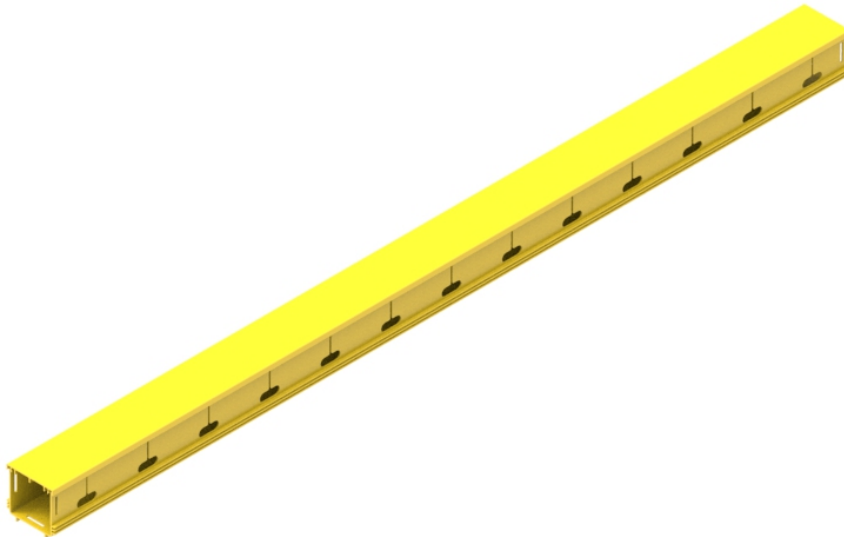

This 100mm duct has slots along the sides at 150mm intervals and provides external vision of the duct's contents. It carries up to 1100 pigtailed or patch cords (Ø2mm) to a depth of 50 mm. The duct comes complete with a snap-on full length lid and is made of tough Noryl plastic, which is a zero halogen, fire retardant plastic. It connects to other 100mm duct sections and various elbows, crosses, adapters etc., using either: a standard joiner (Part No: TC1279-27) or a slotless joiner (Part No: TC1279-248A). It is recommended that each outlet slot be fitted with an outlet radius guide (Part No: TC1279-212KIT – x 10 in a pack), that will guarantee the outgoing radius for every optical fibre cord. These are available separately.

## Benefits & Features:

- Includes cover (Part No: TC 1279-24SNM)
- It is recommended that each outlet slot be fitted with an outlet radius guide (Part No: TC1279-212KIT – x 10 in a pack), that will guarantee the outgoing radius for every housed optical fibre cord. These are available separately
- Clips straight into joiner
- Tough, fire retardant material
- Joiners (Part No: TC1279-27 or Part No: TC1279-248A); available separately.
- Purchase by the unit

## Technical Attributes:

<b>Dimensions</b>	120mm (W) x 105mm (H) x 2,000mm (D)
<b>Weight</b>	3.3kg
<b>Materials</b>	Fire retardant plastic, Halogen free, UL94-VO rated
<b>Colour</b>	Yellow