




Part Number: **TC1279-275A**
Description: **DUCT AND LID ASSEMBLY,
300mm x 100mm DUCT, X 2m LONG**

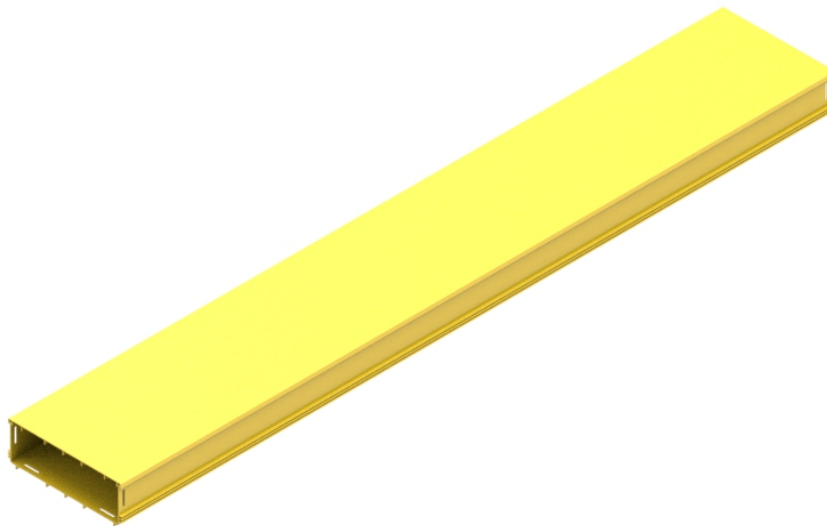

Also available without the lid, as straight duct (Part No: TC1279-275)

Use / Application:

It is recommended that a duct be filled to about 50% of its depth with optical fibre cords. Thus, a 300mm wide duct typically can carry about 5850 of Ø1.6mm optical fibre cords or about 1650 of Ø3mm optical fibre cords, without causing excessive stress on them. The duct comes complete with a lid and is made of tough Noryl plastic with a non-halogen fire retardant. The cover does not have hinges; it clips onto the duct. The duct connects to other 300mm duct sections and various bends, adapters etc., using the slotless joiner (Part No: TC1279-287A). A duct mounting kit (Part No: TC1279-297KIT), is available separately.

Benefits & Features:

- Includes cover (Part No: TC 1279-276)
- Clips straight into the slotless joiner (Part No: TC1279-287A)
- Tough, fire retardant material
- Slotless Joiners (Part No: TC1279-287A); available separately
- Also available without the lid, as straight duct (Part No: TC1279-275)
- Purchase by the unit

Technical Attributes:

Dimensions	312mm (W) x 115mm (H) x 2000mm (D)
Weight	Lid: 2.45kg; Duct: 3.74kg; Duct & Lid: 6.19kg
Materials	Fire retardant plastic, Halogen free, UL94-V0 rated