




Part Number: **TC1279-287A**
Description: **SLOTLESS JOINER, 300mm DUCT**

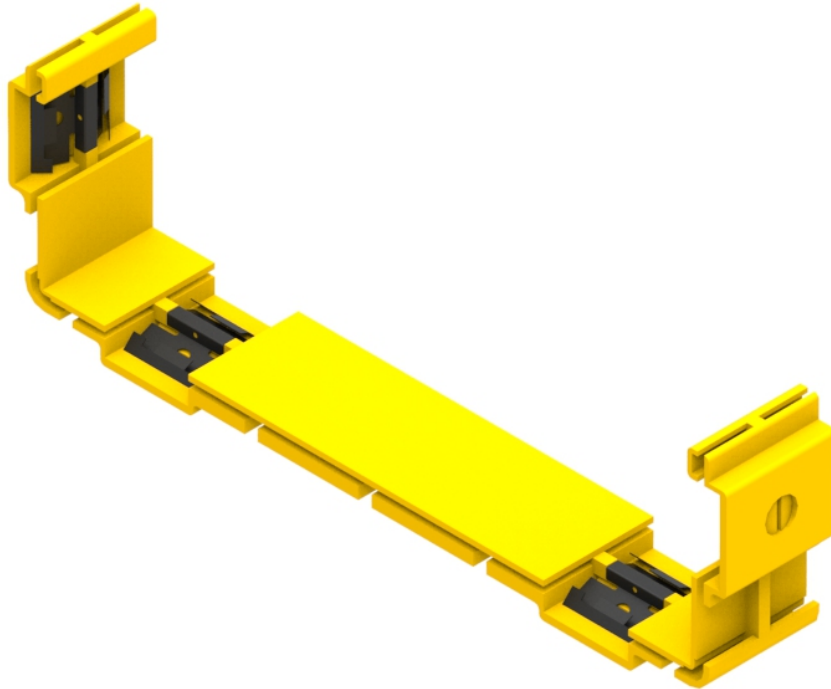

Use / Application:

The slotless joiner is used to link standard 300mm straight ducting with itself or any of the other 300mm components; with which it provides a smooth & strong joint. Typical other fittings are: horizontal or vertical elbows, cross connectors, tees, etc.; which require a joiner at each interface. The slotless joiner incorporates three metal spring brackets, which securely grip with the flat face of the mating 300mm duct components. This ensures that a positive, permanent connection is achieved. The slotless joiner is easily and simply locked or released by turning the locking slot through 90 degrees; using either a coin or wide bladed screwdriver

Benefits & Features:

- Quickly installed on 300mm duct components, to achieve a positive connection
- Quickly released, using either a coin or wide bladed screwdriver
- Incorporates 4 spring brackets, that make a permanent connection between 300mm duct components
- Tough, fire retardant material
- Purchase by the unit

Technical Attributes:

Dimensions	50mm (W) x 100mm (H) x 324mm (D)
Weight	138g
Materials	Fire retardant plastic, Halogen free, UL94-V0 rated